



Desmophen® Desmodur®

New **Pasquick**® – opens the door to very fast ambient curing in the rail and transportation coatings industry.



New Pasquick®

Opens the door to very fast ambient curing in the rail and transportation coatings industry

Pasquick® – opens the door to very fast ambient curing


Heating the drying oven up to 60°C is one of the most expensive cost factors in coating rail and other transportation vehicles.

Thanks to our new **Pasquick®** technology, clearcoats and topcoats can be quickly cured at room temperature. Our latest **Pasquick®** developments combine a very fast, ultra-high solid system with excellent industrial hygiene standards.

How you benefit from new Pasquick® based on Desmophen® NH 1423 LF and Desmodur® ultra N 3600

- Very fast drying at room temperature with no need for additional oven time:
 - Clearcoat: 30–45 min at room temperature
 - Pigmented topcoat: 60 min at room temperature
- Further improves the industrial hygiene standard of proven polyaspartic technology thanks to a low FADEE* component (<0.1%) and a reduced residual monomer content (<0.1%) of the polyisocyanate – in line with measures recommended in safety data sheets
- Easily complies with VOC regulation (up to 250 g/l VOC) thanks to low viscous, very high solid systems
- High gloss retention of clearcoat and pigmented topcoats

Improved gloss retention of pigmented topcoats. New Desmophen® NH 1423 LF compared to standard Pasquick® formulation.

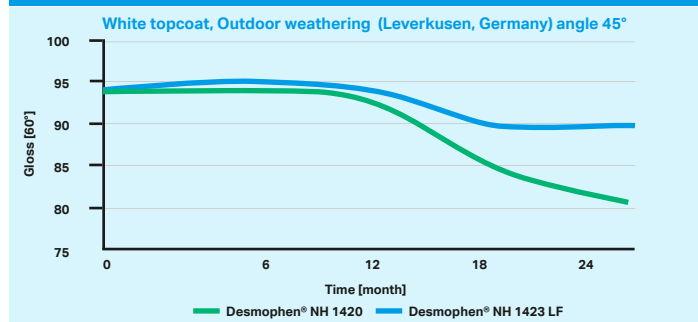

Polyaspartic technology has proved its worth in various industries for many years (e.g., corrosion protection, construction, automotive). Through using our new **Desmophen® NH** and **Desmodur® ultra** products for ambient-curing **Pasquick®** technology, rail and other transportation vehicles can be coated in a more energy-saving and cost-efficient way, while achieving very high standards in industrial hygiene.

Why not take an in-depth look at the opportunities **Pasquick®** opens up for you and your customers?

Product	Supply form solid content [%]	Approx. equivalent weight	Viscosity at 25°C [mpa · s]	Industrial hygiene improvements
Desmophen® NH 1423 LF	100	272	1,500	Low FADEE* content <0.1%

* FADEE = Fumaric acid diethylester

Most suitable polyisocyanate for rail and transportation coatings

Product	Supply form solid content [%]	Approx. equivalent weight	Approx. NCO content on supply form at 23°C	Viscosity at 25°C [mpa · s]	Industrial hygiene improvements
Desmodur® ultra N 3600	100	185	23	1,200	Residual monomer content <0.1%



Covestro Deutschland AG
Kaiser-Wilhelm-Allee 60
51373 Leverkusen
Germany

coatings.covestro.com
info@covestro.com

The manner in which you use our products, technical assistance and information (whether verbal, written or by way of production evaluations), including any suggested formulations and recommendations, is beyond our control. Therefore, it is imperative that you test our products to determine suitability for your processing and intended uses. Your analysis must at least include testing to determine suitability from a technical, health, safety, and environmental and regulatory standpoint. Such testing has not necessarily been done by Covestro, and Covestro has not obtained any approvals or licenses for a particular use or application of the product, unless explicitly stated otherwise. If the intended use of the product is for the manufacture of a pharmaceutical/medicinal product, medical device¹ or of pre-cursor products for medical devices or for other specifically regulated applications which lead or may lead to a regulatory obligation of Covestro, Covestro must explicitly agree to such application before the sale. Any samples provided by Covestro are for testing purposes only and not for commercial use. Unless we otherwise agree in writing, all products are sold strictly pursuant to the terms of our standard conditions of sale which are available upon request. All information, including technical assistance is given without warranty or guarantee and is subject to change without notice. It is expressly understood and agreed by you that you assume and hereby expressly release and indemnify us and hold us harmless from all liability, in tort, contract or otherwise, incurred in connection with the use of our products, technical assistance, and information. Any statement or recommendation not contained herein is unauthorized and shall not bind us. Nothing herein shall be construed as a recommendation to use any product in conflict with any claim of any patent relative to any material or its use. No license is implied or in fact granted under the claims of any patent. These values are typical values only. Unless explicitly agreed in written form, they do not constitute a binding material specification or warranted values.

¹ Please see the "Guidance on Use of Covestro Products in a Medical Application" document.
Edition: 2021 · Printed in Germany